


# 更好使用开发工具提高效率

王志成 20160607




# 键盘设置

- Key Repeat
- Delay Until

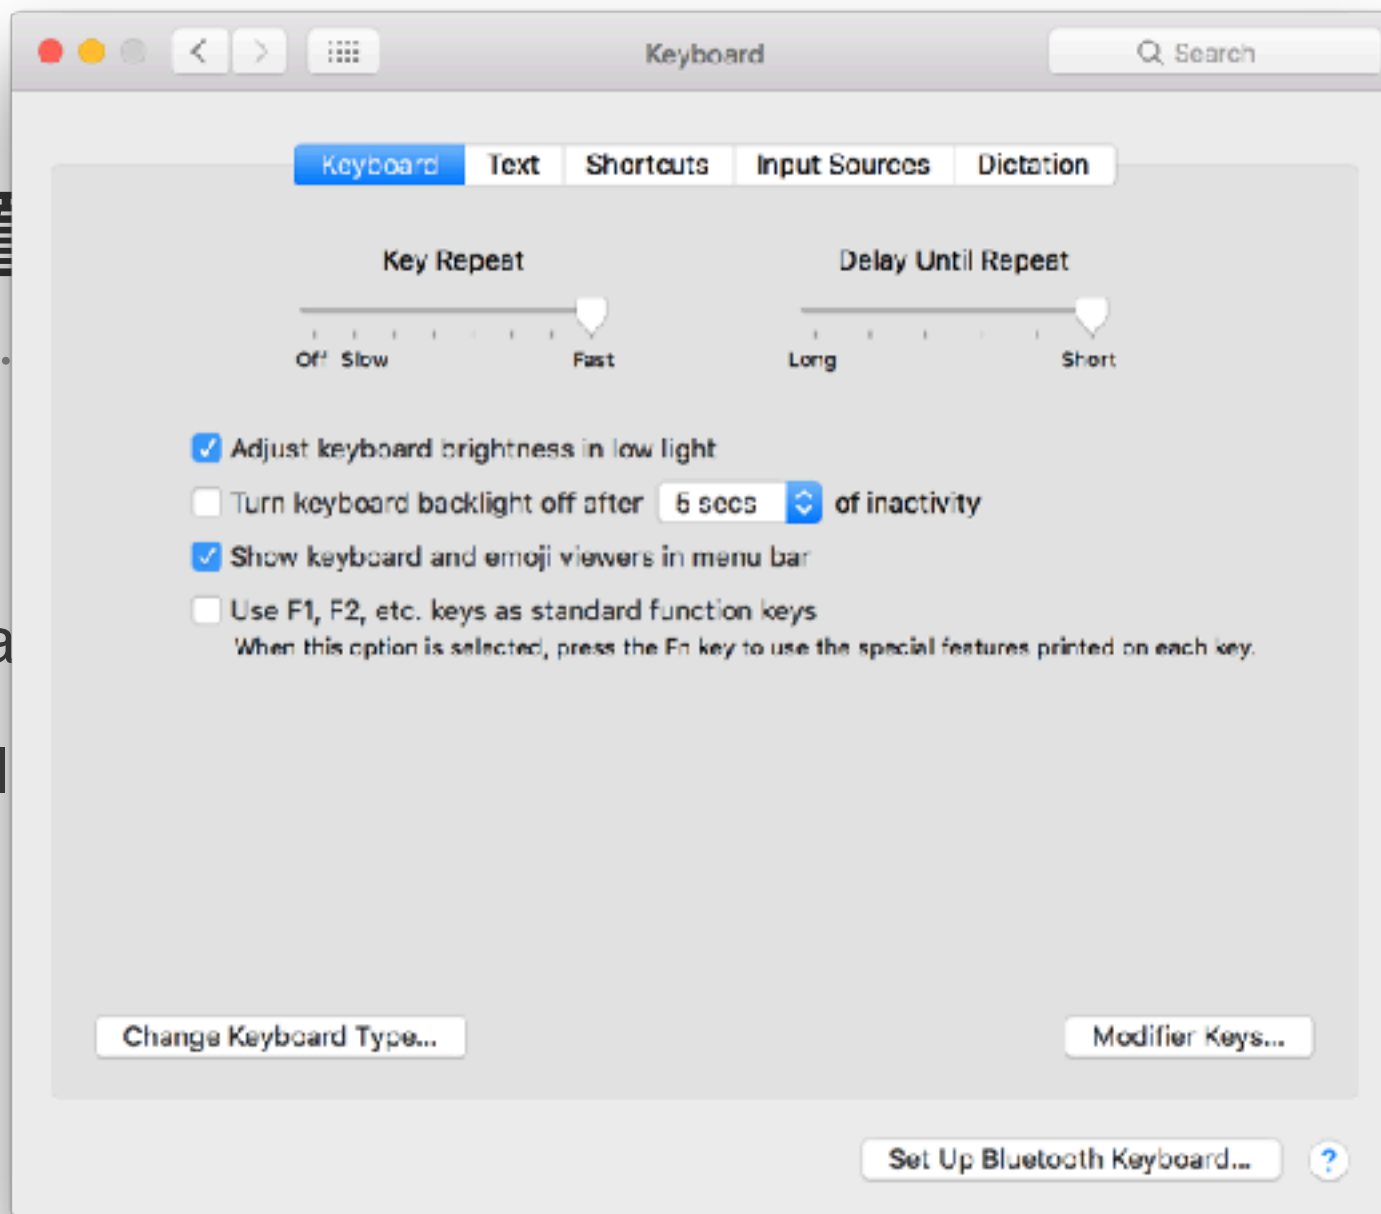



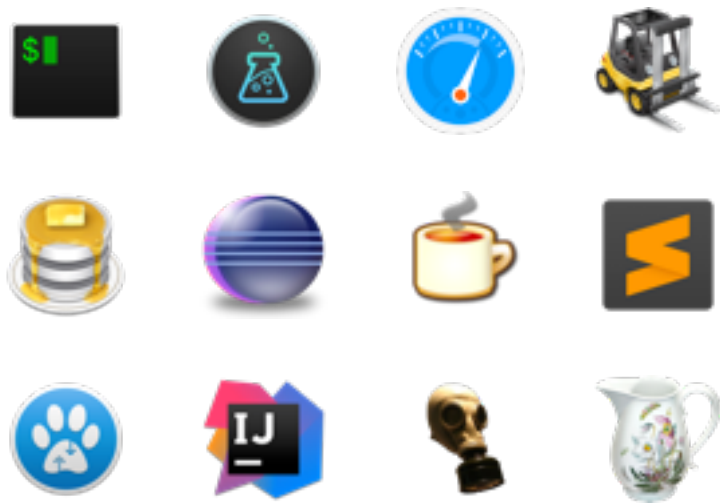

# Bash/Zsh快捷键

---

- CTRL+A            定位到行首
- CTRL+E            定位到行尾
- CTRL+U            Bash删除光标前的内容，Zsh删除一整行
- CTRL+K            删除光标后的内容
- ESC+[backspace]/Ctrl+W 删除光标前的一个单词
- Ctrl+R            搜索历史命令
- Ctrl+\_            撤销修改
- Ctrl+T            互换字符位置



# iTerm自定义快捷键

---

- ⌘← "HEX CODE" 0×01
- ⌘→ "HEX CODE" 0×05
- ⌘← "SEND ESC SEQ" b
- ⌘→ "SEND ESC SEQ" f
- ⌘z "HEX CODE" 0×1f
- ⌘delete "HEX CODE" 0×15
- ⌘delete "HEX CODE" 0×1b 0×08



# iTerm快捷键

---

- ⌘+D 横向Tmux pane
- ⌘+⇧+D 纵向Tmux pane
- ⌘+1 定位tab
- ⌘+U 切换背景是否半透明
- ⌘+Enter 切换全屏
- ⌘+K 清空



# 更好的展示Git diff

---

```
brew install diff-so-fancy  
git config --global core.pager "diff-so-fancy | less --tabs=4 -RFX"
```





```
~/code/diff-so-fancy (fish)
└─ git diff 7fd0cf7c ad58e7f
diff --git a/libs/header_clean/header_clean.pl b/libs/header_clean/header_clean.pl
index 7c544c9..ffd832e 100755
--- a/libs/header_clean/header_clean.pl
+++ b/libs/header_clean/header_clean.pl
@@ -2,12 +2,11 @@
 use strict;
 use warnings;
-use File::Basename;
+use File::Core::Basename;

 my $remove_file_add_header = 1;
-my $remove_file_delete_header = 1;
 my $clean_permission_changes = 1;
-my $change_hunk_indicators = 1;
+my $change_chunk_indicators = 1;

~~~~~

@@ -34,11 +33,13 @@ for (my $i = 0; $i <= $#input; $i++) {

    # Find the second file on the next line: +++ b/README.md
    my $next = $input[++$i];
-   $next =~ /^$ansi_sequence_regex\+\+\+ (\w\w)?(.*?)\e1$/;
+   $next =~ /^$ansi_sequence_regex\+\+\+s(\w\w)?(.*?)\e1$/;
    if ($1) {
        print $1; # Print out whatever color we're using
    }
-   $file_2 = $5;
+   if ($5) {
+       $file_2 = $5;
+   }

    # If they're the same it's a modify
    if ($file_1 eq $file_2) {

diff --git a/package.json b/package.json
index 444c17a..b949434 100644
```

```
~/code/diff-so-fancy (master)
└─ git diff 7fd0cf7c ad58e7f

modified: libs/header_clean/header_clean.pl

@ header_clean.pl:5 @
use strict;
use warnings;
use File::Basename;
use File::Core::Basename;

my $remove_file_add_header = 1;
my $remove_file_delete_header = 1;
my $clean_permission_changes = 1;
my $change_hunk_indicators = 1;
my $change_chunk_indicators = 1;

~~~~~

@ header_clean.pl:36 @ for (my $i = 0; $i <= $#input; $i++) {

    # Find the second file on the next line: +++ b/README.md
    my $next = $input[++$i];
-   $next =~ /^$ansi_sequence_regex\+\+\+ (\w\w)?(.*?)\e1$/;
+   $next =~ /^$ansi_sequence_regex\+\+\+s(\w\w)?(.*?)\e1$/;
    if ($1) {
        print $1; # Print out whatever color we're using
    }
-   $file_2 = $5;
+   if ($5) {
+       $file_2 = $5;
+   }

    # If they're the same it's a modify
    if ($file_1 eq $file_2) {

modified: package.json

@ package.json:1 @
```

# 更好的代码搜索the\_silver\_search

---

```
brew install the_silver_searcher
```



# Sublime Text设置

---

```
alias subl="/Applications/Sublime Text.app/Contents/SharedSupport/bin/subl"
```

- ⌘+⇧+L 每行行尾插入光标
- 鼠标中键 插入光标
- ⌘+D 选中下一个词
- ⌘+⇧+D 复制当前行
- ⌘+K, ⌘+L 转为小写
- ⌘+K, ⌘+U 转为大写



```
{
  "bold_folder_labels": true,
  "caret_style": "phase",
  "close_windows_when_empty": true,
  "copy_with_empty_selection": false,
  "default_line_ending": "unix",
  "enable_tab_scrolling": false,
  "font_face": "Fira Code",
  "font_size": 21,
  "highlight_line": true,
  "highlight_modified_tabs": true,
  "ignored_packages":
  [
    "Vintage"
  ],
  "indent_guide_options":
  [
    "draw_normal"
  ],

```



# IntelliJ IDEA

---

- Maven Helper
- MyBatis plugin
- FindBugs-IDEA
- CamelCase (Alt+Shift+U)



# IntelliJ IDEA快捷键

---

- $\backslash + \text{⌘} + M$           代码块抽取成方法
- $\backslash + \text{⌘} + C$           提取常量
- $\backslash + \text{⌘} + T$           代码块surround
- $\uparrow + F7$               智能步入
- $\text{⌘} + \uparrow + \text{Enter}$       智能补全
- $\text{⌘} + N$                 新建文件 / 生成代码



# Google Chrome

---

- JSON Formatter
- Clear Cache



Console			
Filter			
Time	Connection	Database	Query
16:00:27	test_seagull	cep_test_s	SET NAMES 'utf8';
16:00:27	test_seagull	cep_test_s	SHOW TABLE STATUS LIKE 'customer';
16:00:27	test_seagull	cep_test_s	SET NAMES 'utf8mb4';
16:00:27	test_seagull	cep_test_s	SET NAMES 'utf8';
16:00:27	test_seagull	cep_test_s	SHOW CREATE TABLE `customer`;
16:00:27	test_seagull	cep_test_s	SET NAMES 'utf8mb4';
16:00:27	test_seagull	cep_test_s	SELECT * FROM `customer` LIMIT 0,100;
16:00:27	test_seagull	cep_test_s	SELECT COUNT(1) FROM `customer`;
16:00:32	test_seagull	cep_test_s	SET NAMES 'utf8';
16:00:32	test_seagull	cep_test_s	SHOW TABLE STATUS LIKE 'customer_tenant';
16:00:32	test_seagull	cep_test_s	SHOW CREATE TABLE `customer_tenant`;
16:00:32	test_seagull	cep_test_s	SET NAMES 'utf8mb4';
16:00:32	test_seagull	cep_test_s	SELECT * FROM `customer_tenant` LIMIT 0,100;
16:00:32	test_seagull	cep_test_s	SELECT COUNT(1) FROM `customer_tenant`;
16:00:33	test_seagull	cep_test_s	SET NAMES 'utf8';
16:00:33	test_seagull	cep_test_s	SHOW TABLE STATUS LIKE 'customer';
16:00:33	test_seagull	cep_test_s	SHOW CREATE TABLE `customer`;
16:00:33	test_seagull	cep_test_s	SET NAMES 'utf8mb4';
16:00:33	test_seagull	cep_test_s	SELECT * FROM `customer` LIMIT 0,100;
16:00:33	test_seagull	cep_test_s	SELECT COUNT(1) FROM `customer`;





# 其他

---

```
alias ag="ag --color-match=31"
```

```
alias pack="mvn clean package -DskipTests=true -Dmaven.test.skip=true"
```



谢谢大家

